


PROSTAR[®] 1000 FM ANTENNA

engineering specifications

Model PR-6000

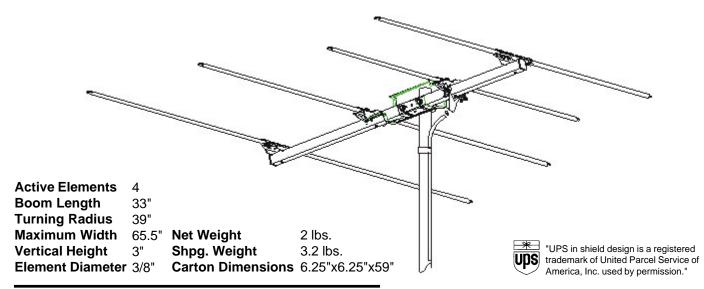

Output Impedance: 300 ohm / 75 ohm with included transformer Recommended Preamp: AP Series Made in U.S.A.

CHANNEL	88MHz	98MHz	108MHz
dB gain over reference dipole	5	5	5.2
beamwidth at half power points	67°	72°	71°
front-to-back ratio	6dB	14dB	16dB

POLAR PATTERNS

